

Poulies Dentées



FRANCE TRANSMISSION SERVICE

**LYON • BOURG • MACON • CHAMBERY
CHALON • GRENOBLE • TIGNIEU • OYONNAX**

Poulies dentées Monobloc




H


Acier de 14 à 48 dents
Fonte de 50 à 120 dents

Désignation	Dents	Dp	Df	Flasque	H 075 (E=26,4)					H 100 (E=31,8)					H 150 (E=46)				
					A	B	C	Type	Masse	A	B	C	Type	Masse	A	B	C	Type	Masse
14 H (A) F	14	56,59	64,0	59	40	40	14	4F	0,59	45	40	14	4F	0,67	58	40	14	4F	0,91
15 H (A) F	15	60,64	66,5	60	40	45	14	4F	0,65	45	45	14	4F	0,77	58	45	14	4F	0,99
16 H (A) F	16	64,67	70,0	61	40	45	14	4F	0,70	45	45	14	4F	0,88	58	45	14	4F	1,08
17 H (A) F	17	68,72	75,0	62	40	45	14	4F	0,73	45	45	14	4F	0,89	58	45	14	4F	1,15
18 H (A) F	18	72,77	79,0	63	40	55	16	4F	0,91	45	55	16	4F	1,06	58	55	16	4F	1,45
19 H (A) F	19	76,81	82,5	64	40	60	16	4F	1,08	45	60	16	4F	1,23	58	60	16	4F	1,55
20 H (A) F	20	80,85	87,0	76	40	62	16	4F	1,18	45	62	16	4F	1,33	58	62	16	4F	1,66
21 H (A) F	21	84,89	91,0	66	40	65	16	4F	1,30	45	65	16	4F	1,43	58	65	16	4F	1,87
22 H (A) F	22	88,93	94,0	67	40	68	16	4F	1,42	45	68	16	4F	1,63	58	68	16	4F	2,07
23 H (A) F	23	92,98	97,0	68	40	72	16	4F	1,67	45	72	16	4F	1,85	58	72	16	4F	2,25
24 H (A) F	24	97,03	102,0	70	40	72	16	4F	1,71	45	72	16	4F	1,93	58	72	16	4F	2,50
25 H (A) F	25	101,06	106,0	71	40	72	16	4F	1,87	45	72	16	4F	2,07	58	72	16	4F	2,71
26 H (A) F	26	105,11	112,0	72	40	80	16	4F	2,00	45	80	18	4F	2,30	58	80	18	4F	2,99
27 H (A) F	27	109,15	115,0	74	40	80	16	4F	2,10	45	80	18	4F	2,40	58	80	18	4F	3,15
28 H (A) F	28	113,18	120,0	74	40	80	16	4F	2,26	45	80	18	4F	2,53	58	80	18	4F	3,39
29 H (A) F	29	117,23	120,0	75						45	80	18	4F	2,70	58	80	18	4F	3,57
30 H (A) F	30	121,29	128,0	78	40	80	16	4F	2,70	45	80	18	4F	2,93	58	80	18	4F	3,86
32 H (A) F	32	129,30	135,0	80	40	80	16	4F	2,85	45	80	18	4F	3,06	58	80	18	4F	4,37
33 H (A) F	33	133,40	142,0	81	40	80	16	4F	3,10	45	80	18	4F	3,40	58	80	18	4F	4,66
34 H (A) F	34	137,45	142,0	81	40	80	16	4F	3,30	45	80	18	4F	3,57	58	80	18	4F	4,98
35 H (A) F	35	141,49	150,0	85	40	80	16	4F	3,50	45	80	18	4F	3,80	58	80	18	4F	5,30
36 H (A) F	36	145,54	150,0	85	40	80	16	4F	3,65	45	80	18	4F	3,92	58	80	18	4F	5,50
38 H (A) F	38	153,62	158,0	86	40	80	18	4F	3,90	45	80	18	4F	4,40	58	80	18	4F	6,10
40 H (A) F	40	161,70	168,0	90	40	80	18	4F	4,23	45	80	18	4F	4,95	58	80	18	4F	6,80
42 H (A) F	42	169,79	184,0	94	40	80	18	4F	4,70	45	80	18	4F	5,50	58	80	18	4F	8,10
44 H (A)	44	177,88	184,0	95	40	80	18	6F	5,20	50	80	18	6F	6,20	58	80	18	6F	8,50
45 H (A)	45	181,91	192,0	96						50	80	18	6F	6,45	58	80	18	6F	9,00
48 H (A)	48	194,03	200,0	100	40	90	18	6F	4,30	50	90	18	6F	5,30	65	90	18	6F	6,70
50 H (A)	50	202,13			45	90	18	6	4,66	50	90	20	6	5,50	65	90	20	6	7,10
52 H (A)	52	210,21								50	90	20	6	5,80	65	90	20	6	7,30
58 H (A)	58	234,47								50	90	20	6	6,20	65	90	20	6	8,10
60 H (A)	60	242,55								50	90	20	6	7,50	65	90	20	6	9,00
70 H (A)	70	282,98								55	100	20	6	8,20	65	100	20	6	10,50
72 H (A)	72	291,06								55	100	20	6	9,00	65	100	20	6	11,00
84 H (A)	84	339,57								55	100	20	6	10,00	65	100	20	6	13,00
96 H (A)	96	388,09								60	120	20	6	13,80	65	120	20	6	17,00
120 H (A)	120	485,12								60	120	20	6	22,00	65	120	20	6	25,00


(A) Largeur de la courroie exprimée en 1/100 pouce soit: 075, 100, 150, 200 et 300



4F - Type plein flasqué



6 - Type évidé non flasqué




6F - Type évidé flasqué


Acier de 14 à 48 dents
Fonte de 50 à 120 dents

Désignation	Dents	Dp	Df	Flasque	H 200 (E=58,7)					H 300 (E=85,7)				
					A	B	C	Type	Masse	A	B	C	Type	Masse
14 H (A) F	14	56,59	64,0	59	70	40	18	4F	1,13	100	40	20	4F	1,35
15 H (A) F	15	60,64	66,5	60	70	45	18	4F	1,21	100	45	20	4F	1,55
16 H (A) F	16	64,67	70,0	61	70	45	18	4F	1,30	100	45	20	4F	1,80
17 H (A) F	17	68,72	75,0	62	70	45	18	4F	1,45	100	45	20	4F	2,10
18 H (A) F	18	72,77	79,0	63	70	55	18	4F	1,65	100	55	20	4F	2,38
19 H (A) F	19	76,81	82,5	64	70	60	18	4F	1,90	100	60	20	4F	2,64
20 H (A) F	20	80,85	87,0	76	70	62	18	4F	2,11	100	62	20	4F	3,10
21 H (A) F	21	84,89	91,0	66	70	65	20	4F	2,23	100	65	20	4F	3,32
22 H (A) F	22	88,93	94,0	67	70	68	20	4F	2,45	100	68	20	4F	3,67
23 H (A) F	23	92,98	97,0	68	70	72	20	4F	2,71	100	72	20	4F	4,00
24 H (A) F	24	97,03	102,0	70	70	72	20	4F	2,97	100	72	20	4F	4,40
25 H (A) F	25	101,06	106,0	71	70	72	20	4F	3,32	100	72	20	4F	4,79
26 H (A) F	26	105,11	112,0	72	70	80	20	4F	3,61	100	80	20	4F	5,20
27 H (A) F	27	109,15	115,0	74	70	80	20	4F	3,90	100	80	20	4F	5,60
28 H (A) F	28	113,18	120,0	75	70	80	22	4F	4,10	100	80	22	4F	5,60
29 H (A) F	29	117,23	120,0	75	70	80	22	4F	4,42	100	80	22	4F	5,80
30 H (A) F	30	121,29	128,0	78	70	80	22	4F	4,74	100	80	22	4F	7,00
32 H (A) F	32	129,30	135,0	80	70	80	22	4F	5,60	100	80	22	4F	7,80
33 H (A) F	33	133,40	142,0	81	70	80	22	4F	5,90	100	80	22	4F	8,70
34 H (A) F	34	137,45	142,0	81	70	80	22	4F	6,20	100	80	22	4F	9,70
35 H (A) F	35	141,49	150,0	85	70	80	24	4F	6,60	100	80	24	4F	9,80
36 H (A) F	36	145,54	150,0	85	70	80	24	4F	7,10	100	80	24	4F	9,90
38 H (A) F	38	153,62	158,0	86	70	80	24	4F	7,80	100	80	24	4F	11,00
40 H (A) F	40	161,70	168,0	90	70	80	24	4F	8,40	100	80	24	4F	12,20
42 H (A) F	42	169,79	180,0	94	70	80	24	4F	9,50	100	80	24	4F	13,70
44 H (A)	44	177,88	184,0	95	70	80	26	6F	10,50	100	80	26	6	15,00
45 H (A)	45	181,91	192,0	96	70	80	26	6F	11,30	100	80	26	6	15,34
48 H (A)	48	194,03	200,0	100	75	90	26	6F	8,60	100	90	26	6	16,36
50 H (A)	50	202,13			75	90	26	6	8,30	100	90	26	6	17,04
52 H (A)	52	210,21			75	90	26	6	8,50	100	90	26	6	17,72
58 H (A)	58	234,47			75	90	26	6	10,00	100	90	26	6	19,77
60 H (A)	60	242,55			75	90	26	6	11,00	100	90	26	6	20,45
70 H (A)	70	282,98			75	100	30	6	12,50	100	100	30	6	23,86
72 H (A)	72	291,06			75	100	30	6	14,00	100	100	30	6	24,54
84 H (A)	84	339,57			75	100	30	6	15,00	100	100	30	6	28,63
96 H (A)	96	388,09			75	120	30	6	20,30	100	100	30	6	32,72
120 H (A)	120	485,12			75	120	30	6	28,00	100	100	30	6	40,90


(A) Largeur de la courroie exprimée en 1/100 pouce soit: 075, 100, 150, 200 et 300



4F - Type plein flasqué



6 - Type évidé non flasqué



6F - Type évidé flasqué

Poulies dentées Monobloc





L

Acier de 10 à 48 dents
Fonte de 50 à 96 dents

Désignation	Dents	Dp	Df	Flasque	L 050 (E=19)						L 075 (E=25,4)					L 100 (E=31,8)				
					A	B	C	Type	Masse		A	B	C	Type	Masse	A	B	C	Type	Masse
10 L (A) F	10	30,33	37,0	50	28	20	8	4F	0,11		38	20	8	4F	0,15	45	20	8	4F	0,15
11 L (A) F	11	33,35	37,0	50	30	24	8	4F	0,14		38	24	8	4F	0,17	45	24	8	4F	0,20
12 L (A) F	12	36,37	43,0	52	30	24	8	4F	0,17		38	24	10	4F	0,22	45	24	10	4F	0,26
13 L (A) F	13	39,41	44,0	83	30	28	8	4F	0,18		38	28	10	4F	0,25	45	28	10	4F	0,30
14 L (A) F	14	42,44	48,0	54	30	28	12	4F	0,22		38	28	12	4F	0,28	45	28	12	4F	0,34
15 L (A) F	15	45,48	51,0	55	30	34	12	4F	0,28		38	34	12	4F	0,38	45	34	11	4F	0,45
16 L (A) F	16	48,51	54,0	56	32	36	12	4F	0,35		38	36	12	4F	0,43	45	36	11	4F	0,52
17 L (A) F	17	51,54	57,0	57	32	36	12	4F	0,36		38	36	12	4F	0,44	45	36	11	4F	0,53
18 L (A) F	18	54,59	60,0	58	32	40	12	4F	0,42		38	40	12	4F	0,52	45	40	11	4F	0,62
19 L (A) F	19	57,61	64,0	59	32	40	12	4F	0,45		38	40	12	4F	0,56	45	40	11	4F	0,66
20 L (A) F	20	60,63	66,5	60	32	40	12	4F	0,48		38	40	14	4F	0,59	45	40	11	4F	0,72
21 L (A) F	21	63,68	70,0	61	32	45	12	4F	0,57		38	45	14	4F	0,64	45	45	14	4F	0,77
22 L (A) F	22	66,70	75,0	62	32	45	12	4F	0,59		38	45	14	4F	0,69	45	45	14	4F	0,88
23 L (A) F	23	69,73	79,0	63	32	55	12	4F	0,61		38	55	14	4F	0,76	45	55	14	4F	1,12
24 L (A) F	24	72,77	79,0	63	32	55	12	4F	0,80		38	55	14	4F	0,87	45	55	14	4F	1,13
25 L (A) F	25	75,80	82,5	64	32	55	12	4F	0,85		38	58	14	4F	0,95	45	58	14	4F	1,18
26 L (A) F	26	78,84	86,0	65	32	58	12	4F	0,90		38	58	14	4F	1,06	45	58	14	4F	1,24
27 L (A) F	27	81,86	86,0	65	32	58	12	4F	0,91		38	58	14	4F	1,18	45	58	14	4F	1,35
28 L (A) F	28	84,89	91,0	66	32	58	12	4F	0,95		38	58	14	4F	1,19	45	58	14	4F	1,42
30 L (A) F	30	90,96	97,0	68	32	70	12	4F	1,07		38	70	14	4F	1,33	45	70	14	4F	1,61
32 L (A) F	32	97,03	102,0	70	32	70	12	4F	1,23		38	70	14	4F	1,54	45	70	14	4F	1,84
33 L (A) F	33	100,05	106,0	71	32	70	14	4F	1,30		38	70	14	4F	1,63	45	70	14	4F	1,95
34 L (A) F	34	103,08	112,0	72	32	70	14	4F	1,37		38	70	14	4F	1,37	45	70	16	4F	2,10
35 L (A) F	35	106,12	112,0	72	32	70	14	4F	1,44		38	70	14	4F	1,80	45	70	11	4F	2,23
36 L (A) F	36	109,14	115,0	74	32	70	14	4F	1,50		38	70	14	4F	1,89	45	70	11	4F	2,32
40 L (A) F	40	121,29	128,0	78	32	70	14	4F	1,77		38	70	16	4F	2,35	45	70	11	4F	2,80
42 L (A) F	42	127,34	135,0	80	32	70	14	4F	1,97		38	70	16	4F	2,53	45	70	11	4F	3,10
44 L (A) F	44	133,40	142,0	81	32	70	14	4F	2,20		38	70	16	4F	2,75	45	70	11	4F	3,36
45 L (A) F	45	136,44	142,0	81	32	70	14	4F	2,27		38	70	16	4F	2,86	45	70	11	4F	3,45
48 L (A) F	48	145,54	150,0	85	32	70	14	4F	2,67		38	70	16	4F	3,19	45	70	11	4F	3,86
50 L (A)	50	151,60			32	70	14	6	1,90		38	70	16	6	2,20	45	70	14	6	2,50
52 L (A)	52	157,66			32	70	14	6	2,10		38	70	16	6	2,38	45	70	14	6	2,70
56 L (A)	56	169,79			32	70	14	6	2,18		38	70	16	6	2,49	45	70	14	6	2,91
57 L (A)	57	172,82			32	70	14	6	2,47		38	70	18	6	2,73	45	70	14	6	3,10
60 L (A)	60	181,92			42	75	16	6	3,10		45	75	18	6	3,44	45	75	14	6	3,55
72 L (A)	72	218,29			42	75	16	6	4,86		45	75	18	6	4,58	45	75	14	6	5,00
84 L (A)	84	254,69			42	75	16	6	5,00		45	75	18	6	5,60	45	75	14	6	6,30
96 L (A)	96	291,06			42	75	16	6	6,00		45	75	18	6	7,00	45	75	14	6	8,20

(A) Largeur de la courroie exprimée en 1/100 pouce soit: 050, 075 et 100

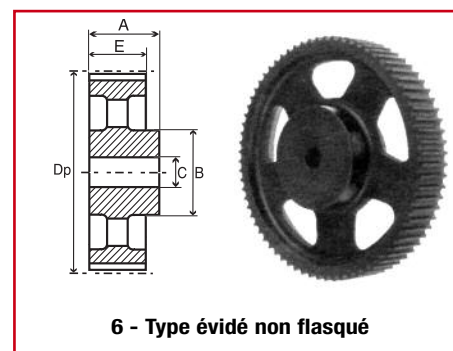
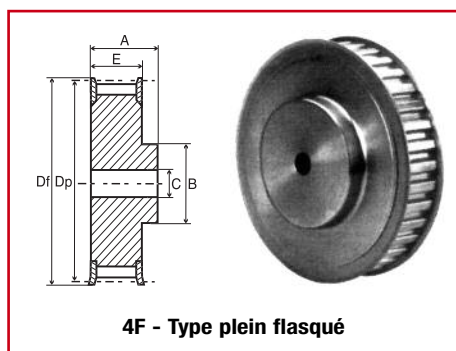


XH

Acier de 18 à 34 dents
Fonte de 38 à 120 dents

Désignation	Dents	Dp	Df	Flasque	XH 200 (E=63,2)					XH 300 (E=90,4)					XH 400 (E=117,3)				
					A	B	C	Type	Masse	A	B	C	Type	Masse	A	B	C	Type	Masse
18 XH (A) F	18	127,34	140,0	155	80	100	24	4F	5,90	110	100	28	4F	8,90	132	100	28	4F	9,50
19 XH (A) F	19	134,41	146,0	156	80	100	24	4F	6,50	110	100	28	4F	9,20	132	100	28	4F	10,02
20 XH (A) F	20	141,49	155,0	157	80	100	24	4F	7,20	110	100	28	4F	9,50	132	100	28	4F	11,80
21 XH (A) F	21	148,56	160,0	158	80	110	24	4F	7,90	110	110	28	4F	10,80	132	110	28	4F	13,20
22 XH (A) F	22	155,64	170,0	159	80	110	24	4F	8,70	110	110	28	4F	12,10	132	110	28	4F	14,73
24 XH (A) F	24	169,79	184,0	161	80	120	24	4F	10,60	110	120	28	4F	14,10	132	120	30	4F	17,80
25 XH (A) F	25	176,86	188,0	162	80	120	26	4F	11,40	110	120	30	4F	15,40	132	120	30	4F	18,50
26 XH (A) F	26	183,93	198,0	163	80	120	26	4F	12,20	110	120	30	4F	16,10	132	120	30	4F	21,10
27 XH (A) F	27	191,01	205,0	164	80	120	26	4F	13,50	110	120	30	4F	18,40	132	120	30	4F	21,90
28 XH (A) F	28	198,09	212,0	165	80	150	26	4F	14,80	110	150	30	4F	20,20	132	150	30	4F	22,60
30 XH (A) F	30	212,23	227,0	167	80	150	26	4F	16,60	110	150	30	4F	23,80	132	150	30	4F	28,70
32 XH (A) F	32	226,38	240,0	169	80	150	26	4F	26,60	110	150	30	4F	26,60	132	150	30	4F	30,60
34 XH (A) F	34	240,53	256,0	170	80	150	26	4F	29,40	110	150	30	4F	29,40	132	150	30	4F	32,50
38 XH (A)	38	268,83			80	150	26	6		120	150	32	6		132	150	32	6	
40 XH (A)	40	282,98			100	150	26	6		120	150	32	6		132	175	32	6	
48 XH (A)	48	339,57			100	150	30	6		120	175	32	6		132	175	32	6	
60 XH (A)	60	424,47			100	150	30	6		120	175	32	6		132	175	32	6	
72 XH (A)	72	509,36			100	190	30	6		120	190	32	6		132	190	32	6	
84 XH (A)	84	594,25			100	190	30	6		120	190	32	6		132	190	32	6	
96 XH (A)	96	679,15			100	190	30	6		120	190	32	6		132	190	32	6	
120 XH (A)	120	848,93			100	190	30	6		120	190	32	6		132	190	32	6	

[A] Largeur de la courroie exprimée en 1/100 pouce soit: 200, 300, 400


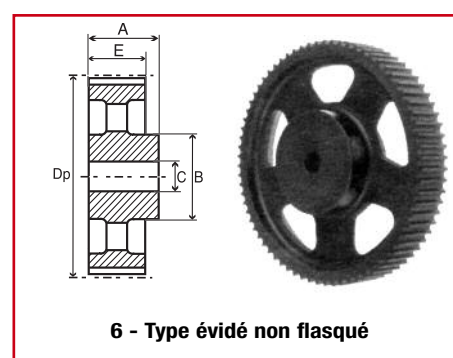
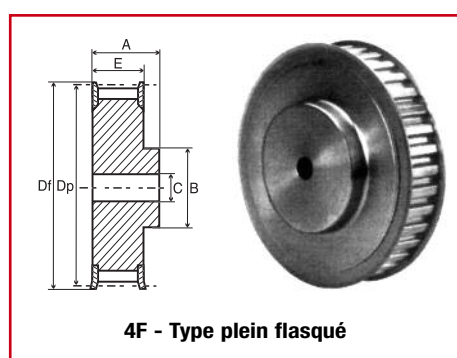




XL - XXH


Acier de 10 à 30 dents
Aluminium de 32 à 72 dents

Désignation	Dents	Dp	Df	Fiasque	ACIER - XL 037 (E=14,3)					ALUMINIUM - XL 037 (E=14,3)				
					A	B	C	Type	Masse	A	B	C	Type	Masse
10 XL 037 F	10	16,17	23,0	1	20	9,5	6	4F	0,02					
11 XL 037 F	11	17,79	23,0	1	20	9,5	6	4F	0,03					
12 XL 037 F	12	19,40	25,0	2	20	10	6	4F	0,03					
13 XL 037 F	13	21,02	25,0	2	20	10	6	4F	0,04					
14 XL 037 F	14	22,64	28,0	4	20	15	6	4F	0,05					
15 XL 037 F	15	24,26	28,0	4	20	15	6	4F	0,05					
16 XL 037 F	16	25,87	32,0	5	20	16	6	4F	0,06	20	16	-	4F	0,07
17 XL 037 F	17	27,49	32,0	6	20	20	6	4F	0,07					
18 XL 037 F	18	29,11	35,0	7	20	20	6	4F	0,08	20	20	-	4F	0,08
19 XL 037 F	19	30,72	35,0	7	22	20	6	4F	0,09					
20 XL 037 F	20	32,34	38,0	9	22	23,5	6	4F	0,10	22	23,5	-	4F	
21 XL 037 F	21	33,96	38,0	9	22	23,5	6	4F	0,11	22	23,5	-	4F	0,06
22 XL 037 F	22	35,57	41,0	10	22	25	6	4F	0,13	22	25	6	4F	0,08
24 XL 037 F	24	38,81	44,0	12	22	30	6	4F	0,15	22	30	6	4F	0,10
26 XL 037 F	26	42,04	48,0	11	22	30	8	4F	0,19					
27 XL 037 F	27	43,66	48,0	11	22	30	8	4F	0,20					
28 XL 037 F	28	45,28	51,0	16	22	34	8	4F	0,22	22	34	8	4F	
30 XL 037 F	30	48,51	54,0	18	22	38	8	4F		22	38	8	4F	
32 XL 037 F	32	51,74	57,0	20	25	38	8	4F		25	38	8	4F	
34 XL 037 F	34	54,98	61,0	22	25	38	8	4F						
35 XL 037 F	35	56,60	61,0	22	25	38	8	4F						
36 XL 037	36	58,21		23						25	45	8	4	
38 XL 037	38	61,45		24						25	45	8	4	
40 XL 037	40	64,68		24						25	45	8	4	
42 XL 037	42	67,91		27						25	45	8	4	
44 XL 037	44	71,17		27						25	45	8	4	
48 XL 037	48	77,62		29						25	45	10	5	
60 XL 037	60	97,02		38						25	45	10	5	
72 XL 037	72	116,42								25	45	10	5	




Pour les versions en Aluminium veuillez ajouter la mot ALU à la référence.

Désignation	Dents	Dp	Df	Fiasque	Acier ACIER - XXH 200 (E=64,2)					Acier ACIER - XXH 300 (E=91,4)				
					A	B	C	Type	Masse	A	B	C	Type	Masse
18 XXH (A) F	18	181,91	198,0	163	100	140	28	4F	14,20	110	140	28	4F	16,00
20 XXH (A) F	20	202,13	212,0	165	100	150	28	4F	17,30	110	150	28	4F	20,40
22 XXH (A) F	22	232,34	240,0	169	100	150	28	4F	20,00	110	150	28	4F	25,00
24 XXH (A) F	24	242,55	267,0	173	100	150	28	4F	23,60	110	150	28	4F	29,20
26 XXH (A) F	26	262,76	290,0	178	100	150	28	4F	20,00	110	150	28	4F	27,00



Désignation	Dents	Dp	Df	Fiasque	Acier ACIER - XXH 400 (E=118)					Acier ACIER - XXH 500 (E=145,3)				
					A	B	C	Type	Masse	A	B	C	Type	Masse
18 XXH (A) F	18	181,91	198,0	163	140	140	32	4F	20,80	168	140	32	4F	24,00
20 XXH (A) F	20	202,13	212,0	165	140	150	32	4F	26,00	168	150	32	4F	31,40
22 XXH (A) F	22	232,34	240,0	169	140	150	32	4F	31,60	168	150	32	4F	38,30
24 XXH (A) F	24	242,55	267,0	173	140	150	32	4F	35,00	168	150	32	4F	45,00
26 XXH (A) F	26	262,76	290,0	178	140	150	32	4F	32,40	168	150	32	4F	37,50



(A) Largeur de la courroie exprimée en 1/100 pouce soit: 200, 300, 400 et 500





Aluminium						T 5			T 5			T 5		
						Largeur de courroie 10 mm (A=21 - E=15)			Largeur de courroie 16 mm (A=27 - E=21)			Largeur de courroie 25 mm (A=36 - E=30)		
Désignation	Dt	De	Df	Rasque	Type	B	C	Mas.	B	C	Mas.	B	C	Mas.
(A) T5 10 F	10	15,05	19,5	3	2	8	-	0,012	8	-	0,016	8	-	0,023
(A) T5 10 F	12	18,25	23,0	1	2	11	-	0,016	11	-	0,022	11	-	0,031
(A) T5 10 F	14	21,45	25,0	2	2	14	-	0,019	14	-	0,026	14	-	0,037
(A) T5 10 F	15	23,05	28,0	4	2	16	6	0,021	16	6	0,029	16	6	0,041
(A) T5 10 F	16	24,60	32,0	5	2	18	6	0,025	18	6	0,035	18	6	0,050
(A) T5 10 F	18	27,80	32,0	6	2	20	6	0,031	20	6	0,043	20	6	0,061
(A) T5 10 F	19	29,40	36,0	8	2	22	6	0,036	22	6	0,049	22	6	0,070
(A) T5 10 F	20	31,00	36,0	8	2	23	6	0,038	23	6	0,053	23	6	0,076
(A) T5 10 F	22	34,15	38,0	9	2	24	6		24	6		24	6	
(A) T5 10 F	24	37,40	42,0	13	2	26	6	0,054	26	6	0,076	26	8	0,109
(A) T5 10 F	25	38,95	44,0	12	2	26	6	0,058	26	6	0,081	26	8	0,116
(A) T5 10 F	26	40,60	44,0	12	2	26	6		26	6		26	8	
(A) T5 10 F	27	42,20	48,0	11	2	30	8	0,064	30	8	0,090	30	8	0,128
(A) T5 10 F	28	43,75	48,0	11	2	32	8		32	8		32	8	
(A) T5 10 F	30	46,95	51,0	16	2	34	8	0,075	34	8	0,105	34	8	0,150
(A) T5 10 F	32	50,10	54,0	18	2	38	8	0,088	38	8	0,123	38	8	0,176
(A) T5 10 F	36	56,45	64,0	23	2	38	8	0,114	38	8	0,160	38	8	0,230
(A) T5 10 F	40	62,85	66,0	24	2	40	8	0,138	40	8	1,193	40	8	0,276
(A) T5 10 F	42	66,00	70,0	26	2	40	8		40	8		40	8	
(A) T5 10 F	44	69,20	-	27	3	45	8		45	8		45	8	
(A) T5 10 F	48	75,55	-	29	3	50	8	0,200	50	8	0,280	50	8	0,400
(A) T5 10 F	60	95,55	-	100	3	65	8		65	8	0,430	65	8	0,114

3 - Type plein non flasqué

Poulies dentées Monobloc



AT5 - AT10



Aluminium

Désignation	Dt	De	Df	Flasque	Fig.	AT 5 Largeur de courroie 10 mm (A=21 - E=15)			AT 5 Largeur de courroie 16 mm (A=27 - E=21)			AT 5 Largeur de courroie 25 mm (A=36 - E=25)		
						B	C	Mas.	B	C	Mas.	B	C	Mas.
(A) AT5 12 F	12	17,85	23	1	2	11	-	0,01	11	-	0,02	11	-	0,03
(A) AT5 14 F	14	21,05	25	2	2	13	-	0,02	13	-	0,03	13	-	0,04
(A) AT5 15 F	15	22,65	28	4	2	16	6	0,02	16	6	0,03	16	6	0,04
(A) AT5 16 F	16	24,2	32	5	2	18	6	0,02	18	6	0,03	18	6	0,04
(A) AT5 18 F	18	27,4	32	6	2	20	6	0,03	20	6	0,04	20	6	0,05
(A) AT5 19 F	19	29	36	8	2	22	6	0,03	22	6	0,04	22	6	0,05
(A) AT5 20 F	20	30,6	36	8	2	23	6	0,04	23	6	0,05	23	6	0,06
(A) AT5 22 F	22	33,85	38	9	2	24	6	0,04	24	6	0,05	24	6	0,06
(A) AT5 24 F	24	37	42	13	2	26	6	0,05	26	6	0,06	26	6	0,07
(A) AT5 25 F	25	38,6	44	12	2	26	6	0,06	26	6	0,07	26	6	0,08
(A) AT5 26 F	26	40,2	44	12	2	26	6	0,06	26	6	0,07	26	6	0,08
(A) AT5 27 F	27	41,8	48	11	2	30	8	0,06	30	8	0,07	30	8	0,08
(A) AT5 28 F	28	43,35	48	11	2	32	8	0,08	32	8	0,08	32	8	0,09
(A) AT5 30 F	30	46,55	51	16	2	34	8	0,07	34	8	0,08	34	8	0,09
(A) AT5 32 F	32	49,7	54	18	2	38	8	0,09	38	8	0,10	38	8	0,11
(A) AT5 36 F	36	56,05	64	23	2	38	8	0,12	38	8	0,13	38	8	0,14
(A) AT5 40 F	40	62,45	66,5	24	2	40	8	0,14	40	8	0,15	40	8	0,16
(A) AT5 42 F	42	65,6	70	26	2	40	8	0,16	40	8	0,17	40	8	0,18
(A) AT5 44	44	68,8	-	-	3	45	8	0,18	45	8	0,19	45	8	0,20
(A) AT5 48	48	75,15	-	-	3	50	8	0,20	50	8	0,21	50	8	0,22
(A) AT5 60	60	94,25	-	-	3	65	8	0,36	65	8	0,37	65	8	0,38

Aluminium

Désignation	Dents	De	Df	Flasque	Fig.	AT 10 Largeur de courroie 16 mm (A=31 - E=21)			AT 10 Largeur de courroie 25 mm (A=40 - E=30)			AT 10 Largeur de courroie 32 mm (A=47 - E=37)			AT 10 Largeur de courroie 50 mm (A=66 - E=56)		
						B	C	Mas.	B	C	Mas.	B	C	Mas.	B	C	Mas.
(A) AT10 15 F	15	45,90	51,0	16	2	32	8	0,12	32	8	0,15	-	-	-	-	-	-
(A) AT10 16 F	16	49,10	54,0	18	2	35	8	0,13	35	8	0,18	-	-	-	-	-	-
(A) AT10 18 F	18	55,45	60,0	21	2	40	8	0,17	40	8	0,22	40	10	0,25	40	10	0,42
(A) AT10 19 F	19	58,65	66,0	24	2	44	8	0,18	44	8	0,25	44	10	0,29	44	10	0,47
(A) AT10 20 F	20	61,80	66,0	24	2	46	8	0,21	46	8	0,28	46	12	0,32	46	12	0,52
(A) AT10 22 F	22	68,20	75,0	27	2	52	8	0,24	52	8	0,33	52	12	0,39	52	12	0,63
(A) AT10 24 F	24	74,55	83,0	29	2	58	8	0,29	58	8	0,39	58	12	0,47	58	12	0,74
(A) AT10 25 F	25	77,75	83,0	29	2	60	8	0,31	60	8	0,42	60	12	0,53	60	12	0,77
(A) AT10 26 F	26	80,90	87,0	31	2	60	8	0,34	60	8	0,48	60	12	0,56	60	12	0,88
(A) AT10 27 F	27	84,10	91,0	32	2	60	8	0,36	60	8	0,54	60	12	0,60	60	12	0,95
(A) AT10 28 F	28	87,25	93,0	33	2	60	8	0,42	60	8	0,60	60	12	0,64	60	12	1,08
(A) AT10 30 F	30	93,65	97,0	35	2	60	8	0,44	60	8	0,64	60	12	0,74	60	12	1,17
(A) AT10 32 F	32	100,00	106,0	38	2	65	10	0,49	65	10	0,69	65	12	0,84	65	12	1,30
(A) AT10 36 F	36	112,75	119,0	43	2	70	10	0,62	70	10	0,87	70	16	1,06	70	16	1,64
(A) AT10 40 F	40	125,45	131,0	47	2	80	10	0,77	80	10	1,07	80	16	1,32	80	16	2,00
(A) AT10 44 F	44	138,20	-	-	3	88	10	0,95	88	10	1,22	88	16	1,61	88	16	2,40
(A) AT10 48 F	48	150,95	-	-	3	95	16	1,10	95	16	1,52	95	16	1,91	95	16	2,83
(A) AT10 60 F	60	189,15	-	-	3	110	16	1,70	110	16	2,34	110	16	3,01	110	16	4,37

Les barreaux aluminium sont également disponibles en longueur de 140 et 160 mm.

HTD 5M

Acier de 12 à 40 dents
Aluminium de 44 à 72 dents




					5M09 (E=14,5)										5M15 (E=20,5)									
					ALUMINIUM					FONTE					ALUMINIUM					FONTE				
Désignation	Dents	Dp	Df	Flasq.	A	B	C	Fig.	Masse	A	B	C	Fig.	Masse	A	B	C	Fig.	Masse	A	B	C	Fig.	Masse
12 5M (A) F	12	19,10	23,0	14						20	13	4	4F	0,02						26	13	4	4F	0,03
14 5M (A) F	14	22,28	25,0	2						20	14	6	4F	0,03						26	14	6	4F	0,04
15 5M (A) F	15	23,87	28,0	4						20	16	6	4F	0,04						26	16	6	4F	0,05
16 5M (A) F	16	25,46	28,0	4						20	16,5	6	4F	0,05						26	16,5	6	4F	0,06
18 5M (A) F	18	27,51	32,0	6						20	20	6	4F	0,07						26	20	6	4F	0,08
20 5M (A) F	20	30,69	36,0	8						22,5	23	6	4F	0,09						26,5	23	6	4F	0,11
21 5M (A) F	21	33,42	38,0	9						22,5	24	6	4F	0,11						26,5	24	6	4F	0,13
22 5M (A) F	22	35,01	39,0	15						22,5	25,5	6	4F	0,11						26,5	25,5	6	4F	0,14
24 5M (A) F	24	38,20	42,0	13						22,5	27	6	4F	0,14						28,5	27	6	4F	0,18
26 5M (A) F	26	41,38	44,0	12						22,5	30	6	4F	0,17						28,5	30	6	4F	0,22
28 5M (A) F	28	44,56	48,0	11						22,5	30,5	6	4F	0,20						28,5	30,5	6	4F	0,25
30 5M (A) F	30	47,75	51,0	16						22,5	35	6	4F	0,23						28,5	35	6	4F	0,30
32 5M (A) F	32	50,93	54,0	18						22,5	38	8	4F	0,21						28,5	38	8	4F	0,35
36 5M (A) F	36	57,30	60,0	21						22,5	38	8	4F	0,32						28,5	38	8	4F	0,42
40 5M (A) F	40	63,66	71,0	25						22,5	38	8	4F	0,40						28,5	38	8	4F	0,52
44 5M (A)	44	70,03	-	-	25,5	38	8	5	0,17						30	38	8	5	0,22					
48 5M (A)	48	76,39	-	-	25,5	45	8	5	0,18						30	38	8	5	0,28					
60 5M (A)	60	95,49	-	-	25,5	45	8	5	0,23						30	50	8	5	0,30					
72 5M (A)	72	114,59	-	-	25,5	45	8	5	0,27						30	50	8	5	0,32					

(A) Largeur de la courroie exprimée en mm soit: 09, 15 et 25

Acier de 12 à 40 dents
Aluminium de 44 à 72 dents


					5M 25 (E=30,5)									
					ALUMINIUM					ACIER				
Désignation	Dents	Dp	Df	Flasq.	A	B	C	Fig.	Masse	A	B	C	Fig.	Masse
12 5M (A) F	12	19,10	23,0	14						36	13	4	4F	0,05
14 5M (A) F	14	22,28	25,0	2						36	14	6	4F	0,07
15 5M (A) F	15	23,87	28,0	4						36	16	6	4F	0,08
16 5M (A) F	16	25,46	28,0	4						36	16,5	6	4F	0,10
18 5M (A) F	18	27,51	32,0	6						36	20	6	4F	0,12
20 5M (A) F	20	30,69	36,0	8						36,5	23	6	4F	0,16
21 5M (A) F	21	33,42	38,0	9						38,5	24	6	4F	0,19
22 5M (A) F	22	35,01	39,0	15						38,5	25,5	6	4F	0,21
24 5M (A) F	24	38,20	42,0	13						38,5	27	6	4F	0,25
26 5M (A) F	26	41,38	44,0	12						38,5	30	6	4F	0,30
28 5M (A) F	28	44,56	48,0	11						38,5	30	6	4F	0,35
30 5M (A) F	30	47,75	51,0	16						38,5	35,5	6	4F	0,42
32 5M (A) F	32	50,93	54,0	18						38,5	38	8	4F	0,48
36 5M (A) F	36	57,30	60,0	21						38,5	38	8	4F	0,59
40 5M (A) F	40	63,66	71,0	25						38,5	38	8	4F	0,74
44 5M (A)	44	70,03	-	-	40	38	8	4	0,32					
48 5M (A)	48	76,39	-	-	40	38	8	5	0,27					
60 5M (A)	60	95,49	-	-	40	50	8	5	0,43					
72 5M (A)	72	114,59	-	-	40	50	8	5	0,52					

(A) Largeur de la courroie exprimée en mm soit: 09, 15 et 25







HTD 8M



4F - Type plein flasqué



5 - Type allégé non flasqué





5F - Type allégé flasqué

					8M20 (E=28)										8M30 (E=38)									
					ACIER					FONTE					ACIER					FONTE				
Désignation	Dents	Dp	Df	Flasq.	A	B	C	Type	Masse	A	B	C	Type	Masse	A	B	C	Type	Masse	A	B	C	Type	Masse
22 8M (A) F	22	56,02	60,0	53	38	43	12	4F	0,54	38	43	12	4F	0,54	48	43	12	4F	0,69	48	43	12	4F	0,69
24 8M (A) F	24	61,12	66,0	69	38	45	12	4F	0,65	38	45	12	4F	0,65	48	45	12	4F	0,84	48	45	12	4F	0,84
26 8M (A) F	26	62,21	70,0	61	38	48	12	4F	0,80	38	50	12	4F	0,80	48	48	12	4F	1,00	48	50	12	4F	1,00
28 8M (A) F	28	71,30	75,0	79	38	50	15	4F	0,87	38	50	15	4F	0,87	48	50	15	4F	1,12	48	50	15	4F	1,12
30 8M (A) F	30	76,39	82,5	73	38	55	15	4F	1,02	38	55	15	4F	1,02	48	55	15	4F	1,32	48	55	15	4F	1,32
32 8M (A) F	32	81,49	87,0	76	38	60	15	4F	1,20	38	60	15	4F	1,20	48	60	15	4F	1,53	48	60	15	4F	1,53
34 8M (A) F	34	86,58	91,0	66	38	66	15	4F	1,40	38	70	15	4F	1,40	48	66	15	4F	1,80	48	70	15	4F	1,80
36 8M (A) F	36	91,67	97,0	68	38	70	15	4F	1,55	38	70	15	4F	1,55	48	70	15	4F	1,99	48	70	15	4F	1,99
38 8M (A) F	38	96,77	102,0	70	38	75	15	4F	1,65	38	75	15	4F	1,65	48	75	15	4F	2,27	48	75	15	4F	2,27
40 8M (A) F	40	101,86	106,0	77	38	75	15	4F	1,74	38	75	15	4F	1,74	48	75	15	4F	2,40	48	75	15	4F	2,40
44 8M (A) F	44	112,05	120,0	75	38	75	15	4F	2,10	38	75	15	4F	2,10	48	75	15	4F	2,80	48	75	15	4F	2,80
48 8M (A) F	48	122,23	128,0	78	38	75	15	4F	2,44	38	75	15	4F	2,44	48	75	15	4F	3,20	48	75	15	4F	3,20
56 8M (A) F	56	142,60	150,0	85	38	80	15	5F	2,60	38	80	15	5F	2,60	48	90	15	5F	3,60	48	90	15	5F	3,60
64 8M (A) F	64	162,97	168,0	90	38	80	15	5F	2,90	38	80	15	5F	2,90	48	90	15	5F	4,30	48	90	15	5F	4,30
72 8M (A) F	72	183,35	192,0	97	38	80	15	5F	3,10	38	80	15	5F	3,10	48	90	15	5F	4,80	48	90	15	5F	4,80
80 8M (A)	80	203,72	-	-	-	-	-	-	-	38	90	15	5	3,80	-	-	-	-	-	48	100	15	5	5,10
90 8M (A)	90	229,18	-	-	-	-	-	-	-	38	90	15	5	4,20	-	-	-	-	-	48	100	15	5	5,70
112 8M (A)	112	285,21	-	-	-	-	-	-	-	38	90	18	6	5,20	-	-	-	-	-	48	100	18	6	6,80
144 8M (A)	144	366,21	-	-	-	-	-	-	-	38	90	20	6	-	-	-	-	-	-	48	100	20	6	9,30
168 8M (A)	168	427,81	-	-	-	-	-	-	-	38	100	20	6	-	-	-	-	-	-	48	100	20	6	11,40

(A) Largeur de la courroie exprimée en mm soit: 20, 30, 50 et 85

					8M50 (E=60)										8M85 (E=95)															
					ACIER					FONTE					ACIER					FONTE										
					A	B	C	Type	Masse	A	B	C	Type	Masse	A	B	C	Type	Masse	A	B	C	Type	Masse						
Désignation	Dents	Dp	Df	Flasq.	22	8M (A) F	22	56,02	60,0	53	70	43	-	4F	1,00	70	43	12	4F	1,00	105	43	-	4F	1,55	105	43	12	4F	1,55
24	8M (A) F	24	61,12	66,0	69	70	45	-	4F	1,23	70	45	12	4F	1,23	105	43	-	4F	1,55	105	45	12	4F	1,90					
26	8M (A) F	26	62,21	70,0	61	70	48	-	4F	1,50	70	50	12	4F	1,50	105	48	-	4F	2,25	105	50	12	4F	2,25					
28	8M (A) F	28	71,30	75,0	79	70	50	-	4F	2,55	70	50	15	4F	2,55	105	50	-	4F	2,55	105	50	15	4F	2,55					
30	8M (A) F	30	76,39	82,5	73	70	55	-	4F	1,97	70	55	15	4F	1,97	105	55	-	4F	3,00	105	55	15	4F	3,00					
32	8M (A) F	32	81,49	87,0	76	70	60	-	4F	2,27	70	60	15	4F	2,27	105	60	-	4F	3,57	105	60	15	4F	3,57					
34	8M (A) F	34	86,58	91,0	66	70	66	-	4F	2,69	70	70	15	4F	2,69	105	66	-	4F	4,00	105	70	15	4F	4,00					
36	8M (A) F	36	91,67	97,0	68	70	70	-	4F	2,97	70	70	15	4F	2,97	105	70	-	4F	4,50	105	70	15	4F	4,50					
38	8M (A) F	38	96,77	102,0	70	70	75	-	4F	3,23	70	75	18	4F	3,23	105	75	-	4F	5,00	105	75	15	4F	5,00					
40	8M (A) F	40	101,86	106,0	77	70	75	18	4F	3,50	70	75	18	4F	3,50	105	75	-	4F	5,20	105	75	18	4F	5,20					
44	8M (A) F	44	112,05	120,0	75	70	75	18	4F	3,90	70	75	18	4F	3,90	105	75	-	4F	6,60	105	75	18	4F	6,60					
48	8M (A) F	48	122,23	128,0	78	70	80	18	4F	4,30	70	80	18	4F	4,30	105	80	-	4F	7,00	105	80	18	4F	7,00					
56	8M (A) F	56	142,60	150,0	85	-	90	18	12F	5,00	-	90	18	12F	5,00	105	80	20	4F	10,00	105	80	20	4F	10,00					
64	8M (A) F	64	162,97	168,0	90	-	100	18	12F	5,60	-	100	18	12F	5,60	-	100	20	12F	10,40	-	100	20	12F	10,40					
72	8M (A) F	72	183,35	192,0	97	-	100	18	12F	6,80	60	100	18	12F	6,80	-	100	20	12F	11,40	-	110	20	12F	11,40					
80	8M (A)	80	203,72	-	-	-	-	-	-	-	-	110	18	12	6,90	-	-	-	-	-	-	110	20	7	11,10					
90	8M (A)	90	229,18	-	-	-	-	-	-	-	-	110	18	12	8,60	-	-	-	-	-	-	110	20	7	12,20					
112	8M (A)	112	285,21	-	-	-	-	-	-	-	-	110	18	7	9,60	-	-	-	-	-	-	110	24	7	15,00					
144	8M (A)	144	366,21	-	-	-	-	-	-	-	-	110	20	7	13,80	-	-	-	-	-	-	110	24	7	21,50					
168	8M (A)	168	427,81	-	-	-	-	-	-	-	-	120	20	7	16,00	-	-	-	-	-	-	120	24	7						

(A) Largeur de la courroie exprimée en mm soit: 20, 30, 50 et 85



HTD 14M

					14M40 (E=54)										14M55 (E=70)													
					ACIER					FONTE					ACIER					FONTE								
					A	B	C	Type	Masse	A	B	C	Type	Masse	A	B	C	Type	Masse	A	B	C	Type	Masse				
Désignation	Dents	Dp	Df	Flasq.																								
28 14M (A) F	28	124,78	128,0	153	69	100	24	4F	4,73	69	100	24	4F	4,73	85	100	24	4F	5,60	85	100	24	4F	5,60				
30 14M (A) F	30	133,69	138,0	154	69	100	24	4F	5,45	69	100	24	4F	5,45	85	100	24	4F	6,60	85	100	24	4F	6,60				
32 14M (A) F	32	142,60	154,0	160	69	100	24	4F	6,17	69	100	24	4F	6,17	85	100	24	4F	7,60	85	100	24	4F	7,60				
34 14M (A) F	34	151,52	160,0	166	69	100	24	4F	6,88	69	100	24	4F	6,88	85	100	24	4F	8,60	85	100	24	4F	8,60				
36 14M (A) F	36	160,43	168,0	168	69	100	24	4F	4,80	69	100	24	4F	4,80	85	100	24	4F	9,60	85	100	24	4F	9,60				
38 14M (A) F	38	169,34	183,0	172	69	120	24	4F	8,28	69	120	24	4F	8,28	85	120	24	4F	10,80	85	120	24	4F	10,80				
40 14M (A) F	40	178,25	188,0	162	69	120	24	4F	9,26	69	120	24	4F	9,26	85	120	24	4F	11,20	85	120	24	4F	11,20				
44 14M (A) F	44	196,08	211,0	175	69	120	24	4F	10,32	69	120	24	4F	10,32	85	120	24	4F	12,50	85	120	24	4F	12,50				
48 14M (A) F	48	213,90	226,0	180	-	-	-	-		69	135	24	5F	11,50	-	-	-	-		70	135	24	12F	13,70				
56 14M (A) F	56	249,55	256,0	182	-	-	-	-		69	135	28	5F	13,05	-	-	-	-		70	135	28	12F	14,50				
64 14M (A) F	64	285,21	296,0	184	-	-	-	-		69	135	28	5F	14,40	-	-	-	-		70	135	28	12F	15,60				
72 14M (A)	72	320,86	-	-	-	-	-	-		69	135	28	6	16,90	-	-	-	-		70	135	28	7	16,90				
80 14M (A)	80	356,51	-	-	-	-	-	-		69	135	28	6	18,50	-	-	-	-		70	135	28	7	20,00				
90 14M (A)	90	401,07	-	-	-	-	-	-		69	135	28	6	20,00	-	-	-	-		70	135	28	7	22,60				
112 14M (A)	112	499,11	-	-	-	-	-	-		69	135	28	6	26,70	-	-	-	-		70	135	28	7	29,50				
144 14M (A)	144	641,71	-	-	-	-	-	-		69	135	28	6		-	-	-	-		70	135	28	7	39,00				
168 14M (A)	168	748,66	-	-	-	-	-	-		68	135	28	6		-	-	-	-		70	135	28	7	48,50				
192 14M (A)	192	855,62													-	-	-	-		70	135	28	7	57,80				

(A) Largeur de la courroie exprimée en mm soit: 40, 55, 85, 115 et 170

					14M85 (E=102)										14M115 (E=133)											
					ACIER					FONTE					ACIER					FONTE						
					Désignation	Dents	Dp	Df	Flasq.	A	B	C	Type	Masse	A	B	C	Type	Masse	A	B	C	Type	Masse	A	B
28	14M (A) F	28	124,78	128,0	153	117	100	24	4F	7,70	117	100	24	4F	7,70	148	100	32	4F		148	100	32	4F		
30	14M (A) F	30	133,69	138,0	154	117	100	24	4F	9,10	117	100	24	4F	9,10	148	100	32	4F		148	100	32	4F		
32	14M (A) F	32	142,60	154,0	160	117	100	24	4F	10,50	117	100	24	4F	10,50	148	100	32	4F		148	100	32	4F		
34	14M (A) F	34	151,52	160,0	166	117	100	24	4F	11,90	117	100	24	4F	11,90	148	100	32	4F		148	100	32	4F		
36	14M (A) F	36	160,43	168,0	168	117	100	32	4F	13,20	117	100	32	4F	13,20	148	120	32	4F		148	120	32	4F		
38	14M (A) F	38	169,34	183,0	172	117	120	32	4F	15,15	117	120	32	4F	15,15	148	120	32	4F		148	120	32	4F		
40	14M (A) F	40	178,25	188,0	162	117	135	32	4F	17,10	117	135	32	4F	17,10	148	135	32	4F		148	135	32	4F		
44	14M (A) F	44	196,08	211,0	175	117	135	32	4F	23,30	117	135	32	4F	23,30	148	140	32	4F		148	140	32	4F		
48	14M (A) F	48	213,90	226,0	180	117	150	32	4F	25,00	117	150	32	4F	25,00	148	150	32	4F		148	150	32	4F		
56	14M (A) F	56	249,55	256,0	182	-	-	-	-		102	150	32	12F	25,00	148	150	32	4F		148	150	32	4F		
64	14M (A) F	64	285,21	296,0	184	-	-	-	-		102	150	32	12F	30,50	-	-	-	-		133	150	32	12F		
72	14M (A)	72	320,86	-	-	-	-	-	-		102	150	32	7	28,80	-	-	-	-		133	150	32	7		
80	14M (A)	80	356,51	-	-	-	-	-	-		102	150	32	7	30,10	-	-	-	-		133	150	32	7		
90	14M (A)	90	401,07	-	-	-	-	-	-		102	150	32	7	33,00	-	-	-	-		133	150	32	7		
112	14M (A)	112	499,11	-	-	-	-	-	-		102	150	32	7	41,80	-	-	-	-		133	150	32	7		
144	14M (A)	144	641,71	-	-	-	-	-	-		102	150	32	7	52,40	-	-	-	-		133	165	32	7		
168	14M (A)	168	748,66	-	-	-	-	-	-		102	150	32	7	60,30	-	-	-	-		133	165	32	7		
192	14M (A)	192	855,62	-	-	-	-	-	-		102	165	32	7	70,20	-	-	-	-		133	165	32	7		






(A) Largeur de la courroie exprimée en mm soit: 40, 55, 85, 115 et 170



HTD 14M

					14M170 (E=187)									
					ACIER					FONTE				
Désignation	Dents	Dp	Df	Flasq.	A	B	C	Type	Masse	A	B	C	Type	Masse
28 14M (A) F	28	124,78	128,0	153	202	100	32	4F	13,80	202	100	32	4F	
30 14M (A) F	30	133,69	138,0	154	202	100	32	4F	15,60	202	100	32	4F	
32 14M (A) F	32	142,60	154,0	160	202	100	32	4F	18,10	202	100	32	4F	
34 14M (A) F	34	151,52	160,0	166	202	100	32	4F	20,40	202	100	32	4F	
36 14M (A) F	36	160,43	168,0	168	202	120	32	4F	23,50	202	120	32	4F	
38 14M (A) F	38	169,34	183,0	172	202	135	32	4F	26,50	202	135	32	4F	
40 14M (A) F	40	178,25	188,0	162	202	140	32	4F	30,10	202	140	32	4F	
44 14M (A) F	44	196,08	211,0	175	202	160	32	4F	37,80	202	160	32	4F	
48 14M (A) F	48	213,90	226,0	180	202	160	32	4F	44,50	202	160	32	4F	
56 14M (A) F	56	249,55	256,0	182	202	160	32	4F	61,00	202	160	32	4F	
64 14M (A) F	64	285,21	296,0	184	202	180	32	4F	81,00	202	180	32	4F	
72 14M (A)	72	320,86	-	-	-	-	-	-	-	-	180	32	12	61,40
80 14M (A)	80	356,51	-	-	-	-	-	-	-	-	180	32	12	65,00
90 14M (A)	90	401,07	-	-	-	-	-	-	-	-	180	38	7	68,00
112 14M (A)	112	499,11	-	-	-	-	-	-	-	-	200	38	7	87,50
144 14M (A)	144	641,71	-	-	-	-	-	-	-	-	220	38	7	114,00
168 14M (A)	168	748,66	-	-	-	-	-	-	-	-	220	38	7	125,00
192 14M (A)	192	855,62	-	-	-	-	-	-	-	-	220	38	7	136,40

(A) Largeur de la courroie exprimée en mm soit: 40, 55, 85, 115 et 170



À MOYEU AMOVIBLE L











Matières :

- acier : C 40 UNI 7845 (18 à 60 dents)
- fonte : C 20 UNI 5007 (72 à 120 dents)

Référence	Dents	Dp	Df	Flasque	L 050 (E=19)					L 075 (E=25)					L 100				
					Moyeu	Type	A	B	Masse	Moyeu	Type	A	B	Masse	Moyeu	Type	A	B	Masse
18 L (A) F (....)	18	54,57	60,0	58	1108	4MF	22	45	0,20	1108	1MF	-	-	0,20	1108	2MF	22	-	0,20
19 L (A) F (....)	19	57,61	64,0	59	1108	4MF	22	45	0,20	1108	1MF	-	-	0,30	1108	2MF	22	-	0,30
20 L (A) F (....)	20	60,64	66,5	60	1108	4MF	22	48	0,20	1108	1MF	-	-	0,30	1108	2MF	22	-	0,40
21 L (A) F (....)	21	63,67	70,0	61	1108	4MF	22	48	0,30	1108	1MF	-	-	0,40	1108	2MF	22	-	0,40
22 L (A) F (....)	22	66,70	75,0	62	1108	4MF	22	51	0,30	1108	1MF	-	-	0,40	1108	2MF	22	-	0,40
23 L (A) F (....)	23	69,73	79,0	63	1108	4MF	22	54	0,40	1108	1MF	-	-	0,40	1108	2MF	22	-	0,50
24 L (A) F (....)	24	72,77	79,0	63	1108	4MF	22	54	0,40	1108	1MF	-	-	0,50	1108	2MF	22	-	0,60
25 L (A) F (....)	25	75,80	82,5	64	1108	4MF	22	56	0,50	1108	1MF	-	-	0,60	1108	2MF	22	-	0,60
26 L (A) F (....)	26	78,83	86,0	65	1108	4MF	22	60	0,50	1108	1MF	-	-	0,60	1108	2MF	22	-	0,70
27 L (A) F (....)	27	81,86	86,0	65	1108	4MF	22	62	0,60	1108	1MF	-	-	0,70	1108	2MF	22	-	0,80
28 L (A) F (....)	28	84,89	91,0	66	1108	4MF	22	65	0,60	1108	1MF	-	-	0,70	1108	2MF	22	-	0,80
30 L (A) F (....)	30	90,96	97,0	68	1108	4MF	22	70	0,80	1108	1MF	-	-	0,90	1210	2MF	25	-	0,90
32 L (A) F (....)	32	97,02	102,0	70	1108	4MF	22	74	0,90	1108	1MF	-	-	1,00	1210	2MF	25	-	1,00
36 L (A) F (....)	36	109,15	115,0	74	1108	4MF	22	85	1,20	1610	1MF	-	-	1,10	1610	2MF	25	-	1,50
40 L (A) F (....)	40	121,28	128,0	78	1610	4MF	25	97	1,50	1610	1MF	-	-	1,60	1610	2MF	25	-	1,70
44 L (A) F (....)	44	133,40	142,0	81	1610	5MF	25	88	1,70	1610	12MF	-	90	1,80	1610	11MF	25	90	2,10
48 L (A) F (....)	48	145,53	150,0	85	1610	5MF	25	88	2,30	1610	12MF	-	92	2,50	1610	11MF	25	92	2,70
60 L (A) (....)	60	181,91	-	-	1610	11M	25	92	2,00	1610	12M	-	92	2,90	1610	8M	25	92	2,40
72 L (A) (....)	72	218,30	-	-	1610	10M	25	92	3,00	1610	7M	-	92	4,00	2012	7M	-	106	4,40
84 L (A) (....)	84	254,68	-	-	1610	10M	25	92	4,00	2012	10M	32	106	5,10	2012	7M	-	106	6,10
96 L (A) (....)	96	291,06	-	-	2012	10M	32	106	5,50	2012	10M	32	106	6,50	2012	7M	-	106	7,00
120 L (A) (....)	120	363,83	-	-	2012	10M	32	106	6,70	2012	10M	32	106	7,50	2012	7M	-	106	8,50

(A): Largeur de la courroie exprimée en 1/100 pouce, soit : 050, 075 et 100

(....): Taille moyeu amovible

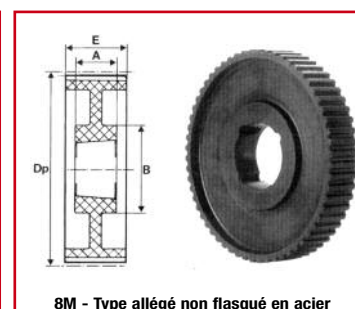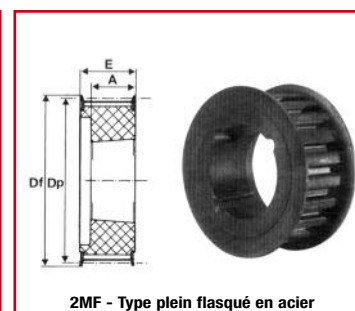



À MOYEU AMOVIBLE H



Matières :

- acier : C 40 UNI 7845 (16 à 48 dents)
- fonte : C 20 UNI 5007 (60 à 120 dents)

Référence	Dents	Dp	Df	Flasque	H 100					H 150				
					Moyeu	Type	A	B	Masse	Moyeu	Type	A	B	Masse
16 H (A) F (...)	16	64,68	70,0	61	1108	2MF	22	-	0,40					
18 H (A) F (...)	18	72,77	79,0	63	1210	2MF	25	-	0,50	1210	2MF	25	-	0,60
19 H (A) F (...)	19	76,81	82,5	64	1210	2MF	25	-	0,60	1210	2MF	25	-	0,70
20 H (A) F (...)	20	80,55	87,0	76	1210	2MF	25	-	0,70	1210	2MF	25	-	0,80
21 H (A) F (...)	21	84,89	91,0	66	1210	2MF	25	-	0,80	1210	2MF	25	-	1,00
22 H (A) F (...)	22	88,94	94,0	67	1210	2MF	25	-	0,90	1210	2MF	25	-	1,20
23 H (A) F (...)	23	92,98	97,0	68	1610	2MF	25	-	0,90	1610	2MF	25	-	1,30
24 H (A) F (...)	24	97,02	102,0	70	1610	2MF	25	-	1,00	1610	2MF	25	-	1,00
25 H (A) F (...)	25	101,06	106,0	71	1610	2MF	25	-	1,00	1610	2MF	25	-	1,20
26 H (A) F (...)	26	105,11	112,0	72	1610	2MF	25	-	1,20	1610	2MF	25	-	1,50
27 H (A) F (...)	27	109,15	115,0	74	1610	2MF	25	-	1,40	1610	2MF	25	-	1,60
28 H (A) F (...)	28	113,19	120,0	75	1610	2MF	25	-	1,50	1610	2MF	25	-	1,80
30 H (A) F (...)	30	121,28	128,0	78	1610	2MF	25	-	1,60	1610	2MF	25	-	2,00
32 H (A) F (...)	32	129,36	135,0	80	1610	11MF	25	80	2,00	1610	11MF	25	80	2,30
36 H (A) F (...)	36	145,53	150,0	85	1610	11MF	25	92	2,60	1610	11MF	25	92	3,00
40 H (A) F (...)	40	161,70	168,0	90	1610	11MF	25	92	3,50	1610	11MF	25	92	4,00
44 H (A) F (...)	44	177,87	184,0	95	2012	12MF	-	106	3,80	2012	11MF	32	106	4,50
48 H (A) F (...)	48	194,04	200,0	100	2012	12MF	-	106	3,30	2012	11MF	32	106	4,80
60 H (A) (...)	60	242,55	-	-	2012	9M	32	106	4,80	2012	9M	32	106	5,50
72 H (A) (...)	72	291,06	-	-	2012	9M	32	106	5,80	2012	9M	32	106	6,50
84 H (A) (...)	84	339,57	-	-	2012	9M	32	106	6,80	2012	9M	32	106	8,40
96 H (A) (...)	96	388,08	-	-	2517	10M	45	119	8,20	2517	9M	45	119	11,00
120 H (A) (...)	120	485,10	-	-	2517	10M	45	119	12,20	2517	9M	45	119	15,00

(A): Largeur de la courroie exprimée en 1/100 pouce, soit : 100 et 150





(...): Taille moyeu amovible

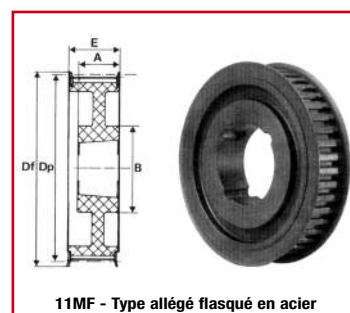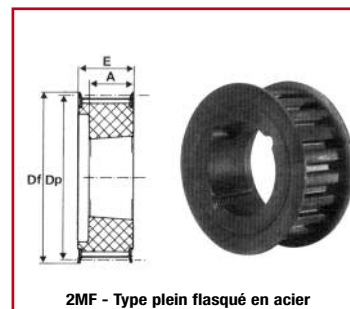

Référence	Dents	Dp	Df	Flasque	H 200					H 300				
					Moyeu	Type	A	B	Masse	Moyeu	Type	A	B	Masse
18 H (A) F (...)	18	72,77	79,0	63	1210	2MF	25	-	0,80					
19 H (A) F (...)	19	76,81	82,5	64	1210	2MF	25	-	0,90					
20 H (A) F (...)	20	80,55	87,0	76	1610	2MF	25	-	1,00	1615	3MF	38	-	1,50
21 H (A) F (...)	21	84,89	91,0	66	1610	2MF	25	-	1,70	1615	3MF	38	-	1,20
22 H (A) F (...)	22	88,94	94,0	67	1610	2MF	25	-	1,50	1615	3MF	38	-	1,50
23 H (A) F (...)	23	92,98	97,0	68	1610	2MF	25	-	1,80	1615	3MF	38	-	1,80
24 H (A) F (...)	24	97,02	102,0	70	1610	2MF	25	-	1,50	1615	3MF	38	-	2,00
25 H (A) F (...)	25	101,06	106,0	71	1610	2MF	25	-	1,50	1615	3MF	38	-	2,00
26 H (A) F (...)	26	105,11	112,0	72	1610	2MF	25	-	1,80	1615	3MF	38	-	2,70
27 H (A) F (...)	27	109,15	115,0	74	1610	2MF	25	-	2,00	2012	3MF	32	-	3,00
28 H (A) F (...)	28	113,19	120,0	75	1610	2MF	25	-	2,00	2012	2MF	32	-	2,50
30 H (A) F (...)	30	121,28	128,0	78	1610	2MF	25	-	2,30	2012	3MF	32	-	3,00
32 H (A) F (...)	32	129,36	135,0	80	2012	2MF	32	-	3,00	2517	3MF	45	-	3,30
36 H (A) F (...)	36	145,53	150,0	85	2012	11MF	32	102	3,00	2517	3MF	45	-	4,50
40 H (A) F (...)	40	161,70	168,0	90	2012	11MF	32	106	3,50	2517	3MF	45	-	6,00
44 H (A) F (...)	44	177,87	184,0	95	2012	11MF	32	106	4,00	2517	8MF	45	119	6,50
48 H (A) F (...)	48	194,04	200,0	100	2517	11MF	45	119	4,50	2517	8MF	45	119	7,50
60 H (A) (...)	60	242,55	-	-	2517	9M	45	119	7,00	2517	9M	45	119	8,50
72 H (A) (...)	72	291,06	-	-	2517	9M	45	119	8,00	2517	9M	45	119	10,50
84 H (A) (...)	84	339,57	-	-	2517	9M	45	119	9,00	2517	9M	45	119	12,50
96 H (A) (...)	96	388,08	-	-	2517	9M	45	119	10,00	3030	9M	76	150	14,20
120 H (A) (...)	120	485,10	-	-	2517	9M	45	119	13,50	3030	9M	76	150	19,00

(A): Largeur de la courroie exprimée en 1/100 pouce, soit : 200 et 300

(...): Taille moyeu amovible

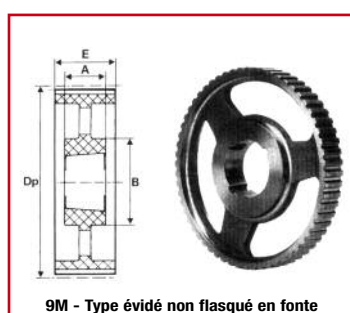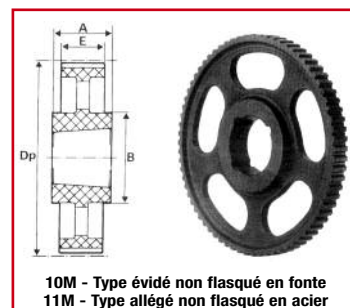

À MOYEU AMOVIBLE HTD

Matières :

- acier : C 40 UNI 7845

5M 15 (E=22)									
Référence	Dents	Dp	Df	Flasque	Moyeu	Type	A	B	Masse
34 5M 15 F (....)	34	54,11	57,0	20	1108	1MF	-	-	0,40
36 5M 15 F (....)	36	57,30	60,0	21	1108	1MF	-	-	0,43
38 5M 15 F (....)	38	60,48	66,5	24	1108	1MF	-	-	0,45
40 5M 15 F (....)	40	63,66	71,0	25	1108	1MF	-	-	0,52
44 5M 15 F (....)	44	70,03	75,0	27	1108	1MF	-	-	0,62
48 5M 15 F (....)	48	76,39	83,0	29	1210	4MF	25	59	0,19
56 5M 15 F (....)	56	89,13	93,0	33	1210	4MF	25	70	0,22
64 5M 15 F (....)	64	101,86	106,0	38	1210	4MF	25	80	0,25
72 5M 15 F (....)	72	114,59	-	-	1610	4M	25	92	0,30
80 5M 15 F (....)	80	127,32	-	-	1610	4M	25	92	0,33
90 5M 15 F (....)	90	143,24	-	-	1610	4M	25	92	0,37
112 5M 15 F (....)	112	178,25	-	-	2012	4M	32	110	0,46
136 5M 15 F (....)	136	216,45	-	-	2012	10M	32	110	0,56

(....): Taille moyeu amovible




1MF - Type plein flasqué en acier

Matières :

- acier : C 40 UNI 7845 (22 à 72 dents)
- fonte : C 20 UNI 5007 (80 à 144 dents)

8M 20 (E=28)										8M 30 (E=38)				
Référence	Dents	Dp	Df	Flasque	Moyeu	Type	A	B	Masse	Moyeu	Type	A	B	Masse
22 8M (A) F (....)	22	56,02	60,0	53	1008	2MF	22	-	0,25	1008	2MF	22	-	0,30
24 8M (A) F (....)	24	61,12	66,0	69	1108	2MF	22	-	0,30	1108	2MF	22	-	0,38
26 8M (A) F (....)	26	66,21	70,0	61	1108	2MF	22	-	0,36	1108	2MF	22	-	0,45
28 8M (A) F (....)	28	71,30	75,0	79	1108	2MF	22	-	0,44	1210	2MF	25	-	0,55
30 8M (A) F (....)	30	76,39	83,0	73	1108	2MF	22	-	0,53	1615	1MF	-	-	0,45
32 8M (A) F (....)	32	81,49	87,0	76	1610	2MF	25	-	0,42	1615	1MF	-	-	0,60
34 8M (A) F (....)	34	86,58	91,0	66	1610	2MF	25	-	0,55	1615	1MF	-	-	0,75
36 8M (A) F (....)	36	91,67	97,0	68	1610	2MF	25	-	0,68	1615	1MF	-	-	1,00
38 8M (A) F (....)	38	96,77	102,0	70	1610	2MF	25	-	0,80	1615	1MF	-	-	1,15
40 8M (A) F (....)	40	101,86	106,0	77	1610	2MF	25	-	1,00	1615	1MF	-	-	1,35
44 8M (A) F (....)	44	112,05	120,0	75	2012	4MF	32	92	1,20	2012	2MF	32	-	1,35
48 8M (A) F (....)	48	122,23	128,0	78	2012	4MF	32	96	1,60	2012	2MF	32	-	1,75
56 8M (A) F (....)	56	142,60	150,0	85	2012	4MF	32	110	2,40	2012	2MF	32	-	3,75
64 8M (A) F (....)	64	162,97	168,0	90	2012	5MF	32	110	2,70	2517	4MF	45	125	4,25
72 8M (A) F (....)	72	183,35	192,0	97	2012	5MF	32	110	3,30	2517	5MF	45	125	4,30
80 8M (A) F (....)	80	203,72	-	-	2012	5M	32	110	3,50	2517	5M	45	125	4,60
90 8M (A) F (....)	90	229,18	-	-	2012	5M	32	110	3,65	2517	5M	45	125	5,00
112 8M (A) F (....)	112	285,21	-	-	-	-	-	-	-	2517	5M	45	125	6,20
144 8M (A) F (....)	144	366,69	-	-	-	-	-	-	-	2517	6M	45	125	9,20

(A): Largeur de la courroie exprimée en mm, soit : 20 et 30 (....): Taille moyeu amovible




4M - Type plein non flasqué en acier
4MF - Type plein flasqué en acier

Matières :


- acier : C 40 UNI 7845 (22 à 72 dents)
- fonte : C 20 UNI 5007 (80 à 144 dents)

8M 50 (E=60)										8M 85 (E=95)				
Référence	Dents	Dp	Df	Flasque	Moyeu	Type	A	B	Masse	Moyeu	Type	A	B	Masse
28 8M (A) F (....)	28	71,30	75,0	79	1210	2MF	25	-	0,75					
30 8M (A) F (....)	30	76,39	83,0	73	1615	2MF	38	-	0,65					
32 8M (A) F (....)	32	81,49	87,0	76	1615	2MF	38	-	0,85					
34 8M (A) F (....)	34	86,58	91,0	66	1615	2MF	38	-	1,05	1615	3MF	38	-	1,45
36 8M (A) F (....)	36	91,67	97,0	68	1615	2MF	38	-	1,30	1615	3MF	38	-	1,85
38 8M (A) F (....)	38	96,77	102,0	70	1615	2MF	38	-	1,60	1615	3MF	38	-	2,25
40 8M (A) F (....)	40	101,86	106,0	77	2012	3MF	32	-	1,25	2012	3MF	32	-	1,75
44 8M (A) F (....)	44	112,05	120,0	75	2012	3MF	32	-	1,70	2012	3MF	32	-	2,30
48 8M (A) F (....)	48	122,23	128,0	78	2012	3MF	32	-	2,30	2517	3MF	45	-	2,65
56 8M (A) F (....)	56	142,60	150,0	85	2517	3MF	45	-	3,40	2517	3MF	45	-	4,50
64 8M (A) F (....)	64	162,97	168,0	90	2517	3MF	45	-	5,00	2517	3MF	45	-	6,75
72 8M (A) F (....)	72	183,35	192,0	97	2517	8MF	45	125	6,75	3020	3MF	51	-	8,00
80 8M (A) F (....)	80	203,72	-	-	3020	3M	51	-	8,75	3020	3M	51	-	10,00
90 8M (A) F (....)	90	229,18	-	-	3020	8M	51	160	8,75	3020	3M	51	-	10,75
112 8M (A) F (....)	112	285,21	-	-	3020	8M	51	170	12,00	3020	8M	51	170	15,00
144 8M (A) F (....)	144	366,69	-	-	3020	9M	51	170	15,25	3525	8M	65	198	22,00
168 8M (A) F (....)	168	427,81	-	-	3525	10M	65	198	16,50	3525	9M	65	198	23,00
192 8M (A) F (....)	192	488,92	-	-	3525	10M	65	198	22,00	3525	9M	65	198	29,00

(A): Largeur de la courroie exprimée en mm, soit : 50 et 85 (....): Taille moyeu amovible



5M - Type allégé non flasqué en fonte
5MF - Type allégé flasqué en acier



3M - Type plein non flasqué en acier
3MF - Type plein flasqué en acier ou fonte



À MOYEU AMOVIBLE HTD

Matières :

- acier : C 40 UNI 7845 (28 à 48 dents)
- fonte : C 20 UNI 5007 (56 à 216 dents)

Référence	Dents	Dp	Df	Flasque	14M 40 (E=54 - B=170)					14M 55 (E=70 - B=170)				
					Moyeu	Type	A	B	Masse	Moyeu	Type	A	B	Masse
28 14M (A) F (...)	28	124,78	128,0	153	2012	3MF	32	-	2,00	2012	3MF	32	-	2,20
29 14M (A) F (...)	29	129,23	138,0	154	2012	3MF	32	-	2,40	2012	3MF	32	-	2,75
30 14M (A) F (...)	30	133,69	138,0	154	2012	3MF	32	-	2,65	2517	3MF	45	-	2,70
32 14M (A) F (...)	32	142,60	154,0	160	2012	3MF	32	-	3,40	2517	3MF	45	-	3,65
34 14M (A) F (...)	34	151,52	160,0	166	2517	3MF	45	-	3,90	2517	3MF	45	-	4,55
36 14M (A) F (...)	36	160,43	168,0	168	2517	3MF	45	-	4,80	2517	3MF	45	-	5,20
38 14M (A) F (...)	38	169,34	183,0	172	2517	3MF	45	-	5,40	2517	3MF	45	-	6,20
40 14M (A) F (...)	40	178,25	188,0	162	2517	3MF	45	-	6,00	2517	3MF	45	-	7,00
44 14M (A) F (...)	44	196,08	211,0	175	3020	3MF	51	-	7,80	3020	3MF	51	-	8,50
48 14M (A) F (...)	48	213,90	226,0	180	3020	3MF	51	-	9,40	3020	3MF	51	-	10,50
56 14M (A) F (...)	56	249,55	256,0	182	3020	3MF	51	-	10,80	3020	3MF	51	-	12,50
64 14M (A) F (...)	64	285,21	296,0	184	3020	8MF	51	-	13,40	3020	8MF	51	-	14,50
72 14M (A) F (...)	72	320,86	-	-	3020	8M	51	-	15,20	3020	8M	51	-	16,25
80 14M (A) F (...)	80	356,51	-	-	3020	9M	51	-	16,00	3020	9M	51	-	17,50
90 14M (A) F (...)	90	401,07	-	-	3020	9M	51	-	17,80	3020	9M	51	-	20,00
112 14M (A) F (...)	112	499,11	-	-	3020	9M	51	-	25,60	3020	9M	51	-	28,50
144 14M (A) F (...)	144	641,71	-	-	3020	9M	51	-	33,00	3020	9M	51	-	36,25
168 14M (A) F (...)	168	748,66	-	-	3020	9M	51	-	44,00	3020	9M	51	-	49,00
192 14M (A) F (...)	192	855,62	-	-	3020	9M	51	-	49,00	3020	9M	51	-	53,00
216 14M (A) F (...)	216	962,57	-	-	3020	9M	51	-	55,00	3535	10M	89	-	66,00

(A): Largeur de la courroie exprimée en mm, soit : 40 et 55 (...): Taille moyeu amovible

Matières :

- acier : C 40 UNI 7845 (28 à 48 dents)
- fonte : C 20 UNI 5007 (56 à 216 dents)

Référence	Dents	Dp	Df	Flasque	14M 85 (E=102)					14M 115 (E=133)				
					Moyeu	Type	A	B	Masse	Moyeu	Type	A	B	Masse
28 14M (A) F (...)	28	124,78	128,0	153	2517	3MF	45	-	2,75	2517	3MF	45	-	3,75
29 14M (A) F (...)	29	129,23	138,0	154	2517	3MF	45	-	3,50	2517	3MF	45	-	4,00
30 14M (A) F (...)	30	133,69	138,0	154	2517	3MF	45	-	3,75	2517	3MF	45	-	5,00
32 14M (A) F (...)	32	142,60	154,0	160	2517	3MF	45	-	4,75	2517	3MF	45	-	6,75
34 14M (A) F (...)	34	151,52	160,0	166	2517	3MF	45	-	5,75	2517	3MF	45	-	6,75
36 14M (A) F (...)	36	160,43	168,0	168	3020	3MF	51	-	5,75	3020	3MF	51	-	7,00
38 14M (A) F (...)	38	169,34	183,0	172	3020	3MF	51	-	6,75	3020	3MF	51	-	8,50
40 14M (A) F (...)	40	178,25	188,0	162	3020	3MF	51	-	8,00	3020	3MF	51	-	9,25
44 14M (A) F (...)	44	196,08	211,0	175	3020	3MF	51	-	11,75	3030	3MF	76	-	14,00
48 14M (A) F (...)	48	213,90	226,0	180	3020	3MF	51	-	15,00	3030	3MF	76	-	17,25
56 14M (A) F (...)	56	249,55	256,0	182	3525	3MF	65	-	22,50	3535	3MF	89	-	24,75
64 14M (A) F (...)	64	285,21	296,0	184	3525	8MF	65	190	26,00	3535	8MF	89	190	29,00
72 14M (A) F (...)	72	320,86	-	-	3525	8M	65	190	25,50	3535	8M	89	190	29,00
80 14M (A) F (...)	80	356,51	-	-	3525	9M	65	190	29,25	3535	9M	89	190	33,00
90 14M (A) F (...)	90	401,07	-	-	3525	9M	65	190	30,75	3535	9M	89	190	36,50
112 14M (A) F (...)	112	499,11	-	-	3525	9M	65	190	39,50	3535	9M	89	190	46,00
144 14M (A) F (...)	144	641,71	-	-	3525	9M	65	190	51,00	4040	9M	102	230	68,00
168 14M (A) F (...)	168	748,66	-	-	3525	9M	65	190	61,00	4040	9M	102	230	82,60
192 14M (A) F (...)	192	855,62	-	-	4040	7M	102	230	86,00	4040	9M	102	230	96,00
216 14M (A) F (...)	216	962,57	-	-	4040	7M	102	230	91,00	4040	9M	102	230	107,00


(A): Largeur de la courroie exprimée en mm, soit : 85 et 115 (...): Taille moyeu amovible

- acier : C 40 UNI 7845 (28 à 48 dents)
- fonte : C 20 UNI 5007 (56 à 216 dents)


Référence	Dents	Dp	Df	Flasque	14M 170 (E=187)				
					Moyeu	Type	A	B	Masse
38 14M (A) F (...)	38	169,34	183,0	172	3030	3MF	76	-	11,70
40 14M (A) F (...)	40	178,25	188,0	162	3030	3MF	76	-	13,00
44 14M (A) F (...)	44	196,08	211,0	175	3535	3MF	89	-	40,00
48 14M (A) F (...)	48	213,90	226,0	180	3535	3MF	89	-	19,00
56 14M (A) F (...)	56	249,55	256,0	182	3535	3MF	89	-	28,50
64 14M (A) F (...)	64	285,21	296,0	184	4040	3MF	102	-	41,00
72 14M (A) F (...)	72	320,86	-	-	4040	8M	102	230	46,90
80 14M (A) F (...)	80	356,51	-	-	4040	8M	102	230	48,00
90 14M (A) F (...)	90	401,07	-	-	4040	9M	102	230	52,50
112 14M (A) F (...)	112	499,11	-	-	5050	9M	127	265	74,50
144 14M (A) F (...)	144	641,71	-	-	5050	9M	127	265	91,00
168 14M (A) F (...)	168	748,66	-	-	5050	9M	127	265	116,00
192 14M (A) F (...)	192	855,62	-	-	5050	9M	127	265	134,00
216 14M (A) F (...)	216	962,57	-	-	5050	9M	127	265	146,50

(A): Largeur de la courroie exprimée en mm, soit : 170


(...): Taille moyeu amovible

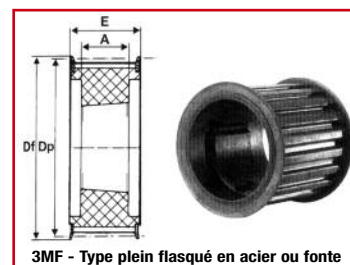


3MF - Type plein flasqué en acier ou fonte

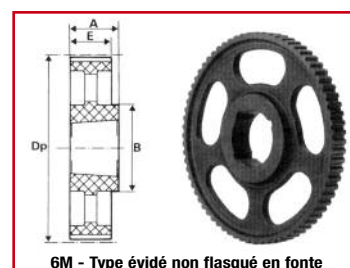


6M - Type évidé non flasqué en fonte

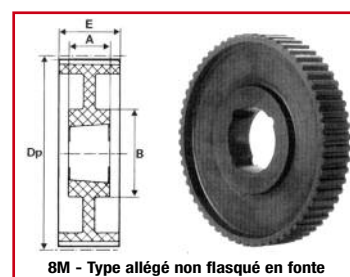


8M - Type allégé non flasqué en fonte

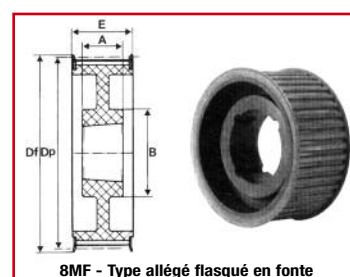

8MF - Type allégé flasqué en fonte

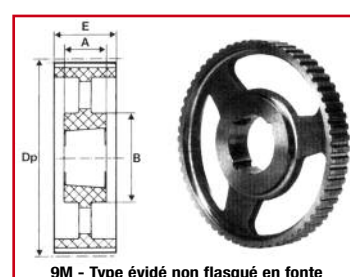

9M - Type évidé non flasqué en fonte

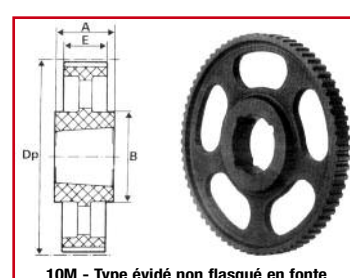

10M - Type évidé non flasqué en fonte